



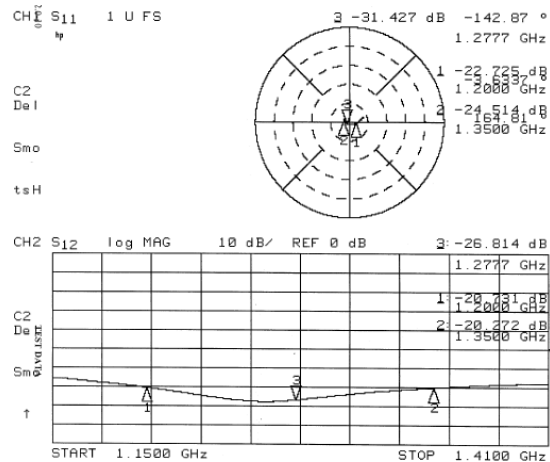

### 1.2 – 1.35 GHz Coaxial Circulator, L-Band, 3A3NBH

Looking for a High Power, L-band circulator for early warning, counter fire Radar? Renaissance's latest 3A3NBH operates from 1.2 to 1.35 GHz and handles 2.2 KW peak while operating from -20 to 85°C.

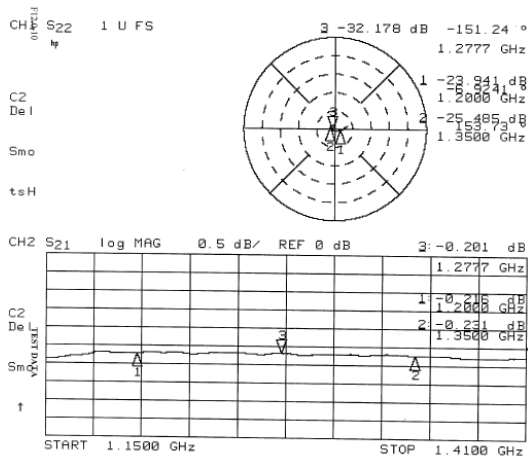

#### Features and Benefits

- Designed for EW radars
- Loss loss/high isolation improves system fidelity
- 2.2 KW peak power handling
- Compact size

#### Specifications

Frequency	1.2 – 1.35 GHz
Insertion loss	0.5 dB
Isolation	18 dB
VSWR	1.25:1
Power	2200 W Peak 60µSec pulse width 20% duty cycle
Temperature	-20°C to 85°C
Size	1.67" x 1.50" x 1.01"