


22.5 – 23.6 GHz Coaxial Isolator, K-Band, 2A9NNJ

Ideal for SOTM communication systems, Renaissance has designed this K-Band Coaxial Isolator. Providing high resolution and throughput, this isolator operates at 22.5 – 23.6 GHz and offers REC's signature high isolation, low insertion loss and performance.

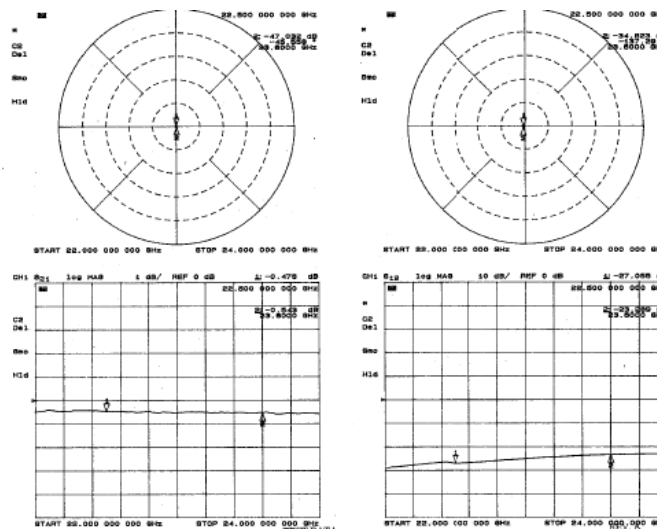

Features and Benefits

- Provides high resolution and throughput
- High isolation, low insertion loss
- Small footprint
- Industrial temperature range

Specifications

Frequency Range	22.5 – 23.6 GHz
Isolation	20 dB
Insertion Loss	0.6 dB
VSWR (max)	1.25 : 1
Power	1 W
Temperature Range	0° C to + 70° C
Size	.50" x 1.38" x .50"