
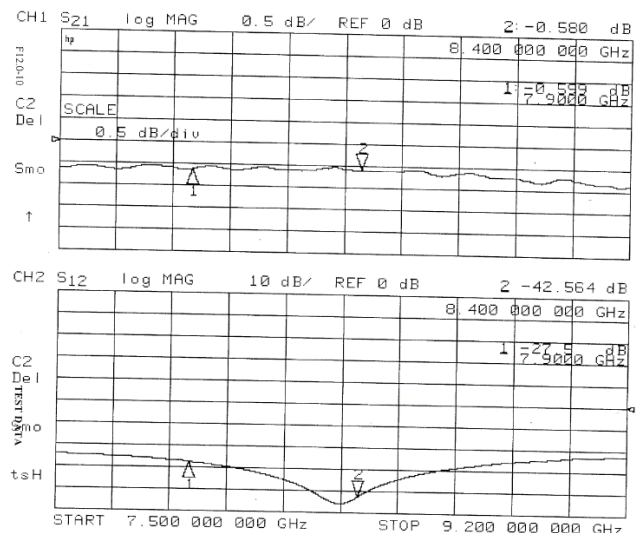


7.9 – 8.4 GHz, Drop-in Isolator, X-band, 2H7NDQ-S

Ideal for modern radars and space applications, Renaissance has designed this X-band drop-in isolator. Operating at 7.9 – 8.4 GHz, this isolator offers great temperature stability, high isolation and low insertion loss.

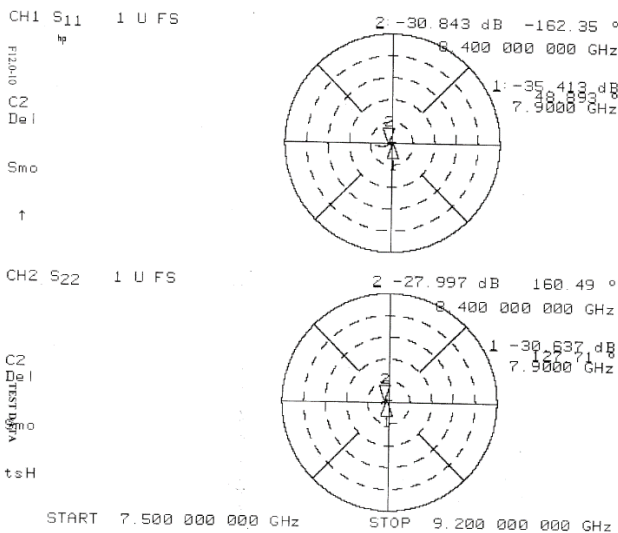

Features and Benefits

- Space Qualified
- Temperature Stability
- High Isolation and Low Insertion Loss
- Compact Footprint

Specifications

Frequency	7.9 – 8.4 GHz
Insertion loss	0.5 dB
Isolation	20 dB
VSWR	1.25 : 1
Load	25 Watts
Temperature	-40° to 85°
Size	.500" x .750" x .18"