


### 6.75 – 14.0 GHz Drop-in Isolator, X-band, 2H8BAK

Renaissance has designed an X-band drop-in isolator ideal for communication, satellite and radar applications. Features include a frequency range of 6.75 – 14.0 GHz, low insertion loss and a small footprint.

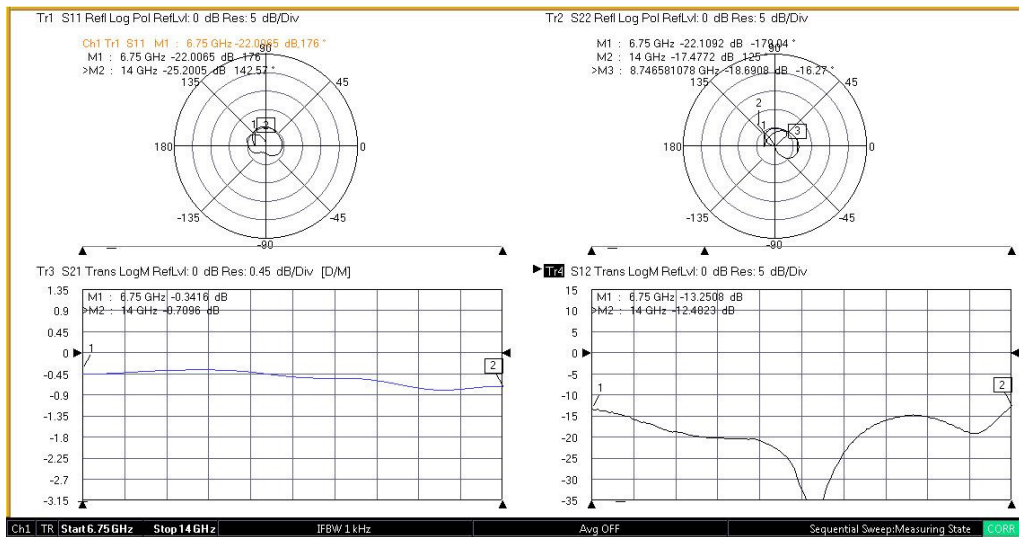

#### Features and Benefits

- Wide frequency range for use in varying communication applications
- Low insertion loss
- Small footprint

#### Specifications

Frequency	6.75 – 14 GHz
Insertion loss	0.9 dB
Isolation	16 dB
VSWR	1.4 : 1
Power (CW)	10W
Power Rev	5W
Temperature	-25°C to 65°C
Size	.75" SQ x .25"