



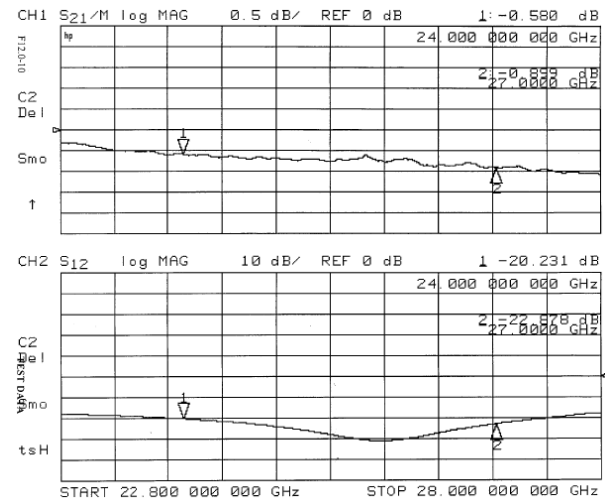

24.0 – 27.0 GHz Drop-In Isolator, K-Band, 2L9NAT-ROHS

Need a drop-in isolator for 5G product development and testing? Renaissance offers this 24 – 27 GHz isolator, with our signature high isolation and low insertion loss, to fit your needs.

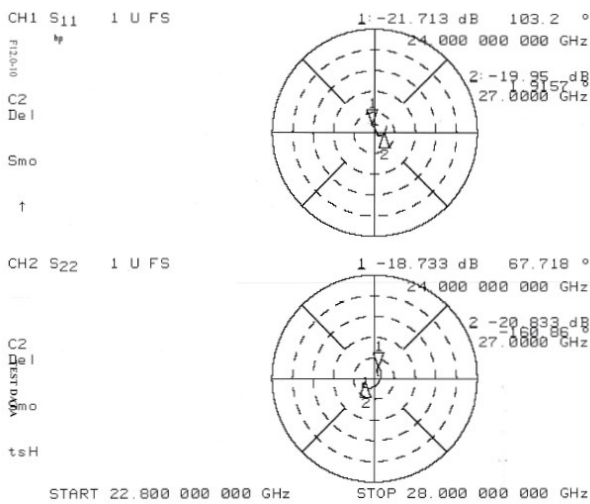

Features and Benefits

- 5G compatible frequency
- High reliability
- High isolation, low insertion loss
- Industrial temperature range
- Compact footprint

Specifications

Frequency	24.0 – 27.0 GHz
Isolation	16 dB
Insertion Loss	1.0 dB
VSWR (MAX)	1.4:1
Load	0.4W
Temperature	-40° C to 70° C
Storage Temperature	-60° C to 150° C
Size	.250 x .500 x .150