


Coaxial Circulators

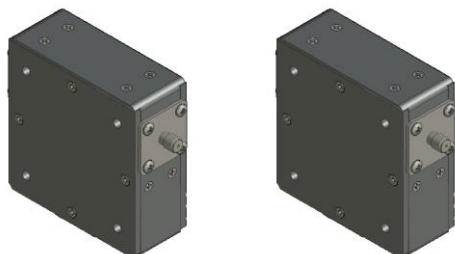

3A2BV and 3A2BW

For public safety & LMR/PMR applications, Renaissance has designed two circulators that covers 225 – 520 MHz with 1 dB of insertion loss and 14 dB of isolation.

PRODUCT FEATURES

- 44% bandwidth
- Low loss, high isolation

BENEFITS

- Broadband covers multiple bands
- Increases systems efficiency

SPECIFICATIONS

	3A2BV	3A2BW
Frequency	225 – 350 MHz	350 – 520 MHz
Insertion loss	1 dB	
Isolation	14 dB	
VSWR (MAX)	1.4 : 1	
Power (CW)	2 W	
Temperature	+20°C to +40°C	
Size	2.8" x 2.8" x 1.14"	