



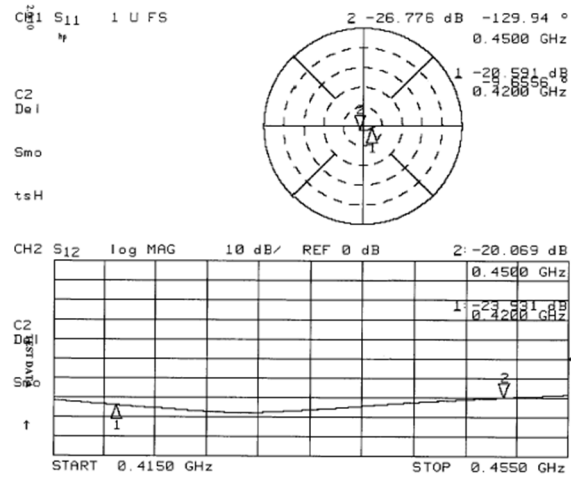

420 – 450 MHz Coaxial Circulator, UHF-band, 3A2NHR

For UHF-band communication, Renaissance has designed a 420 – 450 MHz coaxial circulator, featuring high power, low insertion loss and high isolation.

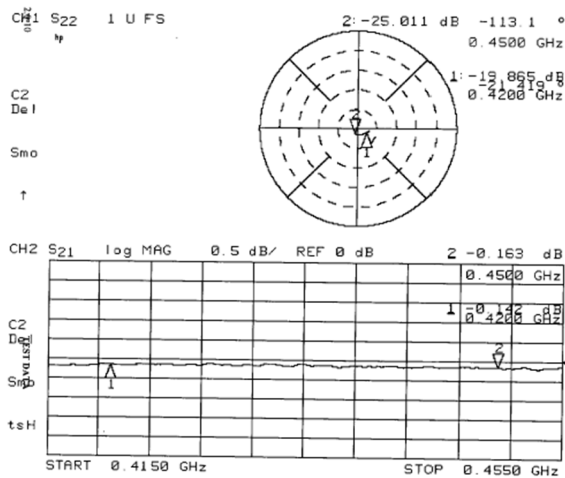

Features and Benefits

- For government and commercial use
- Compact and lightweight
- Industrial temperature range

Specifications

Frequency	420 – 450 MHz
Insertion Loss	0.5 dB
Isolation	20 dB
VSWR	1.25:1
Power	20 Watts; 28% D.C.
Temperature	-10°C to 65°C
Size	1.50" x 1.67" x 1.01"