


600 – 900 MHz Coaxial Circulator, UHF-band, 3A2NHY-S

Designed for your SatCom application needs, Renaissance has designed this space-qualified UHF-band coaxial circulator. With the ability to handle harsh environments, this circulator still offers our signature features of high isolation and low insertion loss in a compact footprint, and meets all NASA's outgassing requirements.

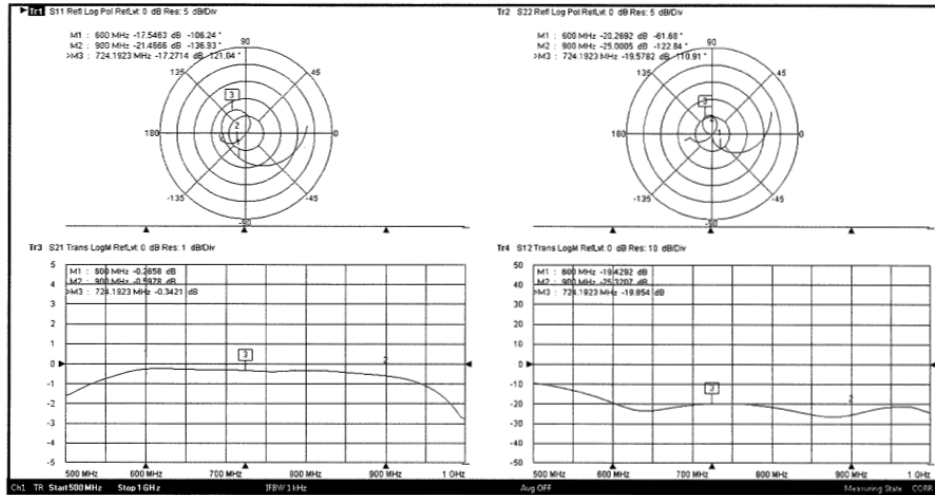

Features and Benefits

- Space qualified
- High isolation, low insertion loss
- Can be used for space or harsh environments

Specifications

Frequency	600 – 900 MHz
Insertion loss	0.5 dB
Isolation	16 dB
VSWR	1.25 : 1
Power (CW)	2W
Temperature	-40°C to 85°C
Size	2.00" x 2.12" x .68"