


# Model 3A4BN Circulator Coaxial

This drawing is the sole property of REC and shall not be copied or reproduced in any form whatsoever. The contents are for the purpose only of quotation to or manufacture for REC and shall not be used as a basis for quotation to or manufacture for others. This drawing shall be returned with quotation or at termination of manufacturing contract or on demand of REC whichever is first.

REVISIONS				
LTR	ECO	DESCRIPTION	DATE	APRVD
A	20060093	DRAWING INITIATED	04/03/06	
-	.	.	.	

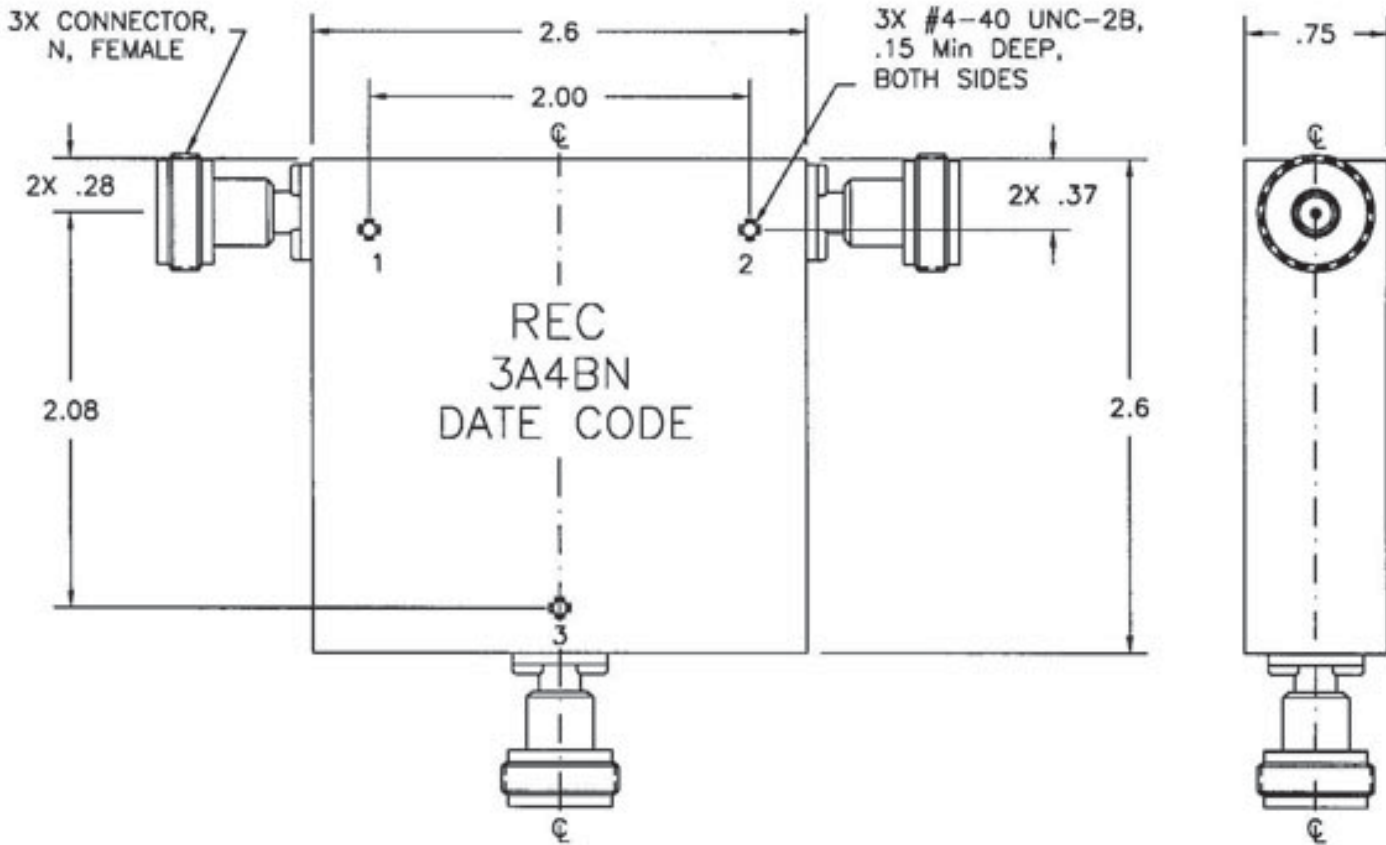

**ELECTRICAL CHARACTERISTICS:**

FREQUENCY RANGE	1350 - 2700 MHz	
TEMPERATURE RANGE	-40°C TO +85°C	
ISOLATION	14 dB Min	16 dB Typ
INSERTION LOSS	0.7 dB Max	0.5 dB Typ
VSWR	1.5 : 1 Max	1.4 : 1 Typ
TEMPERATURE RANGE	-40°C TO +85°C	0°C TO +50°C

USED ON	UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES	DRAWN	DATE	Renaissance Electronics Corporation sales@rec-usa.com 978-772-7774	
	TOLERANCES ON	CHECKED		TITLE	
	DECIMALS	ENG. APVD		CIRCULATOR, COAXIAL	
	ANGLES	MFG. APVD		SIZE CAGE IDENT NO. DRAWING NO.	
CUSTOMER SPECIFICATION #	UNLESS OTHERWISE SPECIFIED ALL OVER	APPROVALS		A	ORJ02 3A4BN
FILE NAME	NOTE: THIS DWG INCORPORATES THIRD ANGLE PROJECTION			PATH: Y\CAD\DRAFTING SHEET 1 OF 1	
OD\3A4BN					