



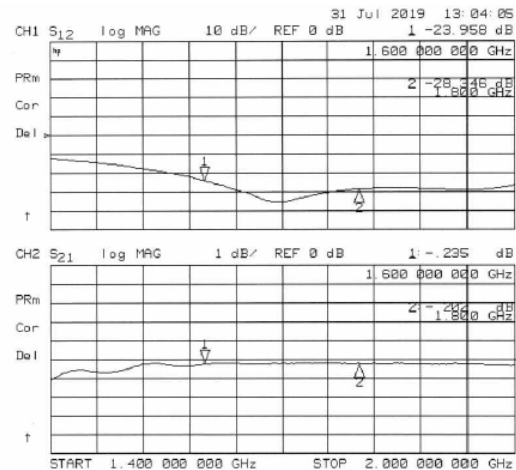

### 1.6 – 1.8 GHz Coaxial Circulator, L-Band, 3A4NPP

Ideal for satellite navigation systems, Renaissance has designed this L-Band coaxial circulator. Operating in the 1.6 – 1.8 GHz frequency range, this circulator offers high isolation and low insertion loss in a compact footprint.

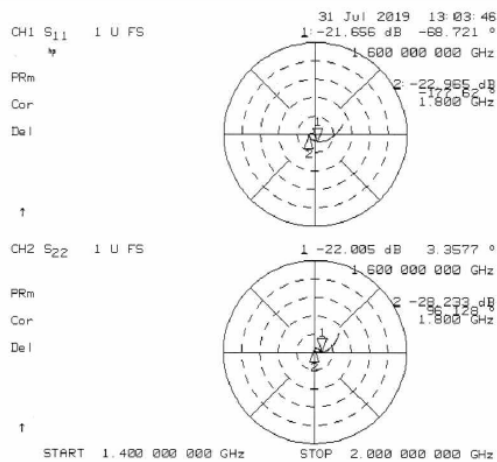

#### Features and Benefits

- High power
- Low VSWR
- Industrial temperature range
- Compact footprint

#### Specifications

Frequency	1.6 – 1.8 GHz
Insertion loss	0.5 dB
Isolation	20 dB
VSWR	1.25 : 1
Power	500 W
Temperature	-20° C to 70° C
Size	1.66" x 1.50" x 1.00"