


2.4 – 2.5 GHz Drop-in Circulator, S-band, 3G4NFH

Need a high power S-band drop-in circulator for military or commercial applications? This 1200 W (Fwd and Rev) is available with very low insertion loss and minimal phase difference.

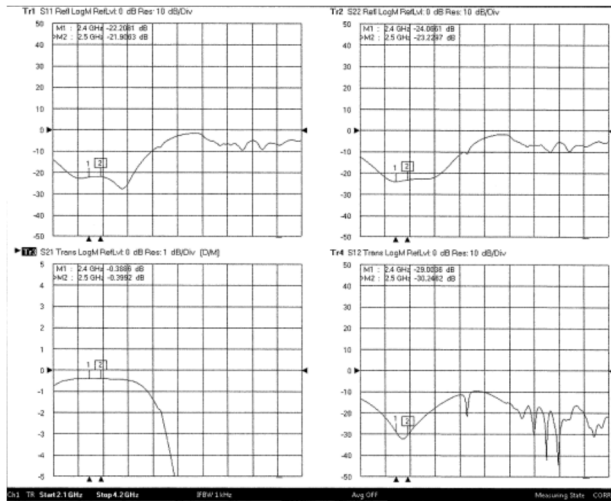

Features and Benefits

- High power handling (1200 W Fwd and Rev)
- Compact size
- Low insertion loss
- Small phase difference

Specifications

| | |
|---------------------|---------------------------|
| Frequency | 2.4 to 2.5 GHz |
| Insertion loss | 0.3 dB typ, 0.5 dB max |
| Isolation | 20 dB |
| VSWR | 1.20 : 1 typ, 1.25 dB max |
| Power FWD | 1200 W |
| Power REV | 1200 W |
| Temperature | -10°C to 70°C |
| Phase, unit to unit | ±3° |
| Size | .750" x .750" x .220" |