


DROP-IN CIRCULATORS (PILLS)



FREQUENCY GHz	ISOLATION dB, MIN	INSERTION LOSS dB, MAX	VSWR MAX	POWER WATTS	MODEL #	DIMENSIONS IN INCHES
5.120 - 5.400	20	0.400	1.250:1	20	3J6NC	0.375 X 0.200 MAX
5.400 - 5.900	20	0.400	1.250:1	20	3J6NB	0.375 X 0.200 MAX
5.900 - 6.400	20	0.400	1.250:1	20	3J6ND	0.375 X 0.200 MAX
9.200 - 10.200	20	0.500	1.250:1	10	3J8NB	0.250 X 0.135 MAX
9.250 - 10.750	18	0.800	1.300:1	10	3J8NE	0.250 X 0.135 MAX
13.400 - 14.400	18	0.500	1.300:1	10	3J9NKL	0.250 X 0.135 MAX

TYPICAL PACKAGE DIMENSIONS

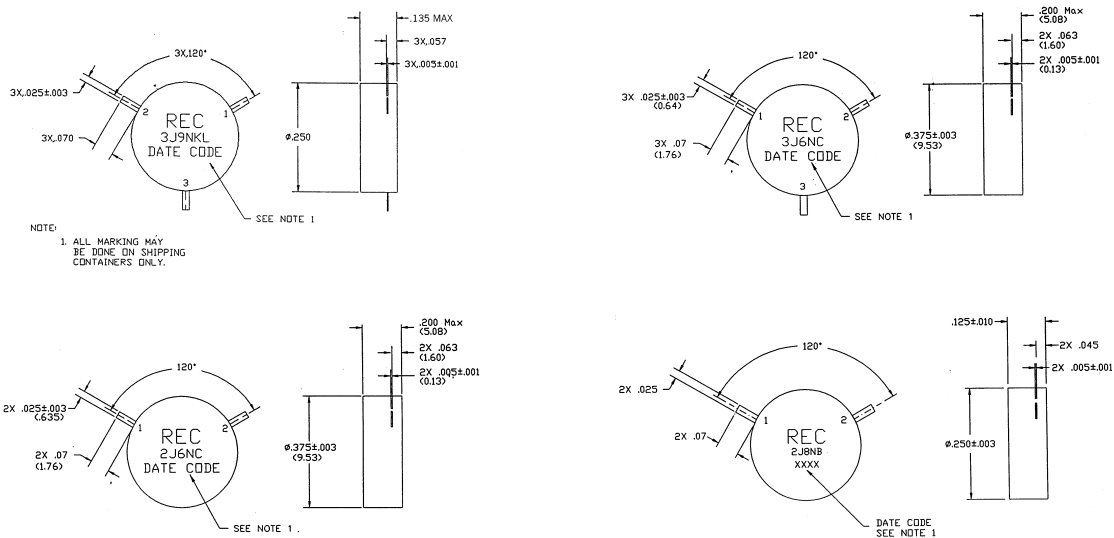

DROP-IN ISOLATORS

FREQUENCY GHz	ISOLATION dB, MIN	INSERTION LOSS dB, MAX	VSWR MAX	POWER, WATTS FWD	POWER, WATTS REV	MODEL #	DIMENSIONS IN INCHES
5.200 - 5.400	20	0.400	1.250:1	20	10	2J6NC	0.375 X 0.200 MAX
4.700 - 5.200	20	0.400	1.250:1	20	10	2J6NF	0.375 X 0.200 MAX
5.850 - 6.425	20	0.500	1.250:1	20	10	2J6NEL	0.375 X 0.200 MAX
6.400 - 7.200	18	0.500	1.300:1	20	10	2J7NH	0.375 X 0.200 MAX
7.200 - 7.800	20	1.500	1.200:1	20	10	2J7NF	0.375 X 0.200 MAX
7.900 - 8.400	20	0.500	1.250:1	20	10	2J8NF	0.375 X 0.200 MAX
9.200 - 10.200	20	0.500	1.250:1	10	5	2J8NB	0.250 X 0.125
10.350 - 10.550	20	0.500	1.250:1	10	5	2J8NH	0.250 X 0.125
13.700 - 14.600	18	0.500	1.300:1	10	5	2J9NM	0.250 X 0.125
17.500 - 20.000	18	0.700	1.300:1	10	5	2J9ND	0.250 X 0.125
21.100 - 23.600	18	0.700	1.300:1	10	5	2J9NJ	0.250 X 0.125