


DUAL DROP-IN CIRCULATOR

FREQUENCY GHz	ISOLATION dB, MIN	INSERTION LOSS dB, MAX	VSWR MAX	POWER, WATTS	MODEL#	DIMENSIONS IN INCHES
0.850 - 0.870	40	0.600	1.250:1	120	3E2NU	2.170 X 1.000 X 0.260
0.871 - 0.960	40	0.600	1.250:1	60	3E2NV	2.170 X 1.000 X 0.260
0.800 - 1.000	40	0.600	1.250:1	5	E2NW	2.170 X 1.000 X 0.260
0.925 - 0.960	40	0.600	1.250:1	65	3E2NX	2.170 X 1.000 X 0.260
1.805 - 1.880	40	0.600	1.250:1	40	3E4NS	1.750 X 0.750 X 0.260
1.930 - 1.990	40	0.600	1.250:1	80	3E4NT	1.750 X 0.750 X 0.260
2.100 - 2.200	40	0.600	1.250:1	60	3E4NU-1	1.750 X 0.750 X 0.260
2.200 - 2.300	40	0.600	1.250:1	60	3E4NU-2	1.750 X 0.750 X 0.260
2.300 - 2.400	40	0.600	1.250:1	60	3E4NU-3	1.750 X 0.750 X 0.260
2.400 - 2.500	40	0.600	1.250:1	60	3E4NU-4	1.750 X 0.750 X 0.260
2.500 - 2.600	40	0.600	1.250:1	60	3E4NU-5	1.750 X 0.750 X 0.260
2.600 - 2.700	40	0.600	1.250:1	60	3E4NU-6	1.750 X 0.750 X 0.260



TYPICAL PACKAGE DIMENSIONS

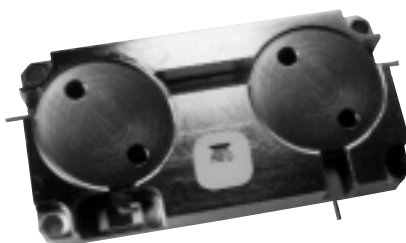