


Micro-Strip Isolator

FREQUENCY GHz	ISOLATION dB, MIN	INSERTION LOSS dB, MAX	VSWR MAX	POWER, WATT		MODEL #
				FWD	REV	
2.300 - 2.700	20	0.400	1.250:1	2	0.250	2W4NH
2.500 - 2.900	20	0.400	1.2500:1	2	0.250	2W4HJ
3.600 - 4.200	20	0.400	1.2500:1	2	0.250	2W5NH
5.900 - 6.450	20	0.500	1.2500:1	2	0.250	2W7NH
7.200 - 8.200	20	0.500	1.2500:1	2	0.250	2W7NJ
8.500 - 9.600	20	0.500	1.2500:1	2	0.250	2W8NK-2
9.600 - 14.400	20	0.500	1.2500:1	2	0.250	2W8BJ
10.000 - 11.000	20	0.500	1.2500:1	2	0.250	2W8NK-3
10.950 - 11.700	20	0.500	1.2500:1	2	0.250	2W9NG
11.000 - 12.500	18	0.600	1.3000:1	2	0.250	2W8NJ
12.000 - 13.500	18	0.600	1.3000:1	2	0.250	2W9NJ
12.400 - 13.000	20	0.500	1.2500:1	2	0.250	2W9NH
14.000 - 14.500	18	0.600	1.3000:1	2	0.250	2W9NM
14.500 - 15.500	18	0.600	1.3000:1	2	0.250	2W9NK
17.700 - 19.700	17	0.800	1.3000:1	2	0.250	2W9NN
21.200 - 23.600	17	0.900	1.3000:1	2	0.250	2W9NP
24.250 - 26.750	20	0.900	1.3000:1	2	0.250	2W9NV
27.350 - 31.700	20	0.900	1.3000:1	2	0.250	2W9NW
34.000 - 36.000	20	0.900	1.3000:1	2	0.250	2W9NT
37.000 - 39.500	20	0.900	1.3000:1	2	0.250	2W9NR



TYPICAL PACKAGE DIMENSIONS

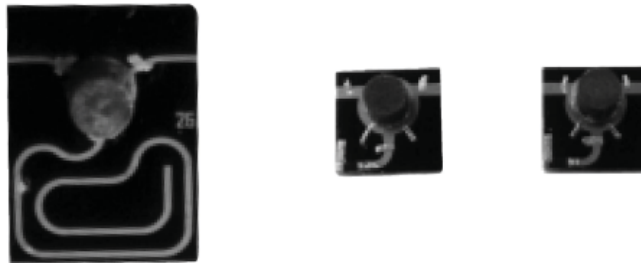