


TRANSMITTER COMBINERS

Renaissance Electronics' base station power combiners for the next generation of commercial wireless systems are field tested for high performance. These combiners have shown low operating temperature and excellent stability for maximum reliability and energy efficiency.

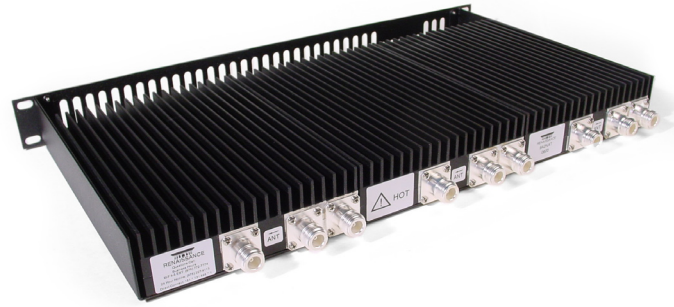

*High
Reliability
"High Isolation"*

Characteristics

Frequency	800, 900, 1800, 1900, 2100, 2500, 3500 MHz
Input Power Per Channel	70W / Channel
Isolation	
TX - TX	25 dB without isolator, 45 dB models with isolators
Insertion Loss (For the Model Shown)	
Single 2-Ways	< 0.5 dB over Split
VSWR	1.20:1
3rd Order IMD (typical)	-70 dBc
Operating Temperature	-30 to +50° C
Configurations	1x to 6x Combiners Available in Single to Triple Configurations

Features

Benefits

· High Isolation	· Less Cross Talk
· Efficient Heat Sink Design	· High Reliability
· Proven Design	· Less Repair
· Standard 19" Rack Size	· Save Rack Space
· Available in Various Channel Combining Configurations	· Customized Solutions


RENAISSANCE[®]
ELECTRONICS CORPORATION

12 LANCASTER COUNTY ROAD
HARVARD, MA 01451
978-772-7774
WWW.REC-USA.COM

The New Thinking in Wireless Technology



© 2007