



LMDS APPLICATIONS

DROP-IN ISOLATORS/CIRCULATORS  
18, 23, 24, 27, 28 GHz

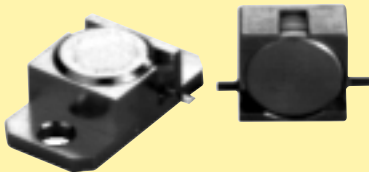

THE RENAISSANCE 0.25 INCH SQUARE OR FLANGE PACKAGE CAN BE CUSTOM-DESIGNED, MANUFACTURED, AND DEPLOYED QUICKLY FOR YOU TO PROVIDE YOUR TARGETED LMDS CUSTOMER WITH PROMPT DELIVERY AND HIGH PROFITABILITY. WHETHER THE CUSTOMER IS AN SBSO, POTS WITH INTERNET ACCESS, OR VIDEO CONFERENCING COMPANY, RENAISSANCE OFFERS AN ARRAY OF QUALITY PRODUCTS FOR LMDS SERVICES. WE PROVIDE MAGNETICALLY SHIELDED ISOLATORS/CIRCULATORS WITH HIGH 16 DB ISOLATION, TYPICAL .7 DB INSERTION LOSS, AND OPTIONAL HIGH FREQUENCIES IN THE 28 GHz SPECTRUM. FREQUENCIES ABOVE 28 GHz ALSO INCLUDE OUR MINIATURE MIC CIRCULATORS AND ISOLATORS.

TYPICAL PACKAGE DIMENSIONS

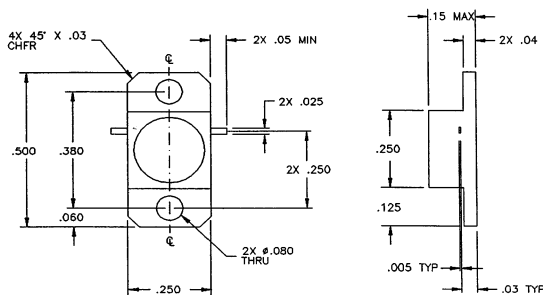

FOR PART NUMBERS

- 2L9NAU: 21.2-23.6 GHz
- 2L9NAG: 17-22 GHz
- 2L9NAZ: 21-24 GHz
- 2L9NAT: 24-27 GHz
- 2L9NAS: 27.5-28.5 GHz

FREQUENCY GHz	ISOLATION dB, MIN	INSERTION LOSS dB, MAX	VSWR MAX	LOAD WATTS	TEMPERATURE RANGE	STORAGE TEMPERATURE
18, 23, 24, 27, 28	16	1.000	1.400:1	.4	-40° TO + 70°C	-60°C TO +150°C
SPECIFICATIONS SUBJECT TO CHANGE WITHOUT NOTICE.						