
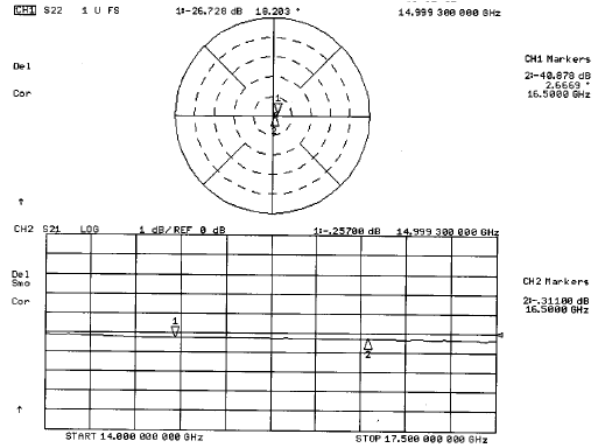


15.0 – 16.5 GHz Coaxial Isolator, Ku-Band, 2A9NNH

Ideal for satellite communications, including satellite TV and radars, Renaissance has designed a 15.0 – 16.5 GHz Coaxial Isolator. With high isolation, low insertion loss and low VSWR this isolator maintains stable performance at 2W and can handle industrial temperature ranges.

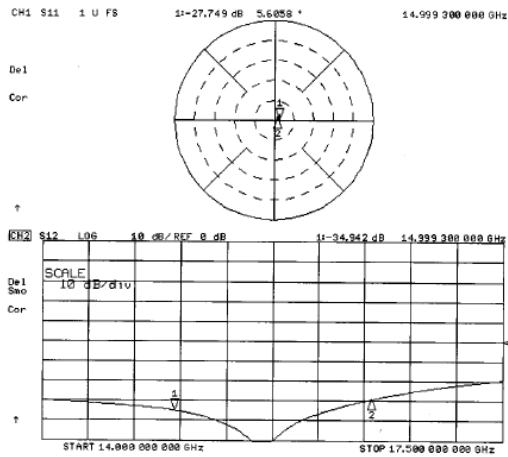

Features and Benefits

- Low VSWR provides higher system efficiency
- Industrial temperature range
- Small footprint
- High isolation, low insertion loss

Specifications

Frequency Range	15.0 – 16.5 GHz
Isolation	20 dB
Insertion Loss	0.5 dB
VSWR (max)	1.25 : 1
Power	2 W
Temperature Range	0° C to + 70° C
Size	.50" x .62" x .50"