



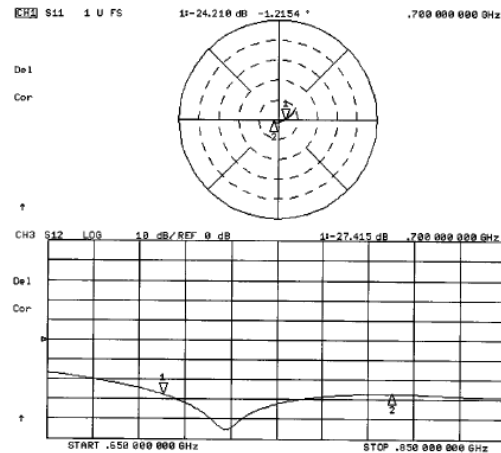

700 – 800 MHz, Coaxial Circulator UHF-Band, 3A2NJM

Attractive for both indoor and outdoor applications, Renaissance offers this UHF-Band Coaxial Circulator. With the ability to handle a wide temperature range, while maintaining low insertion loss, this circulator is suitable for your LTE needs.

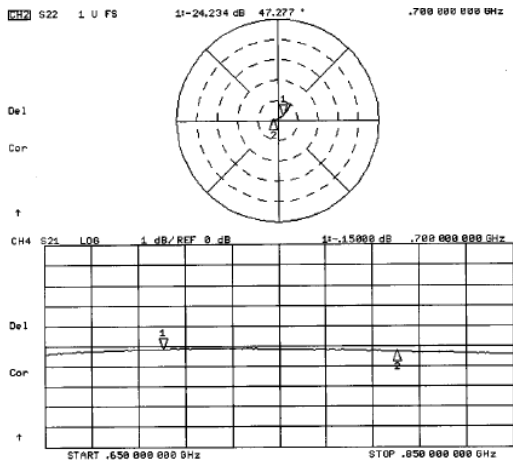

Features and Benefits

- Wide Temperature Range Handling Capability
- Low Insertion Loss
- 10 W CW Power

Specifications

Frequency Range	700 – 800 MHz
Isolation	18 dB
Insertion Loss	0.5 dB
VSWR (max)	1.29 : 1
Power	10 W CW
Temperature Range	-10° C to + 75° C
Size	1.67" x 1.50" x 1.01"