


## Coaxial Isolator

Renaissance Electronics has designed an isolator to protect C-band amplifiers operating between 5.4 to 5.9 GHz.

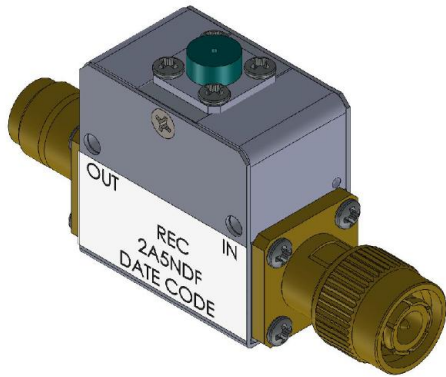

**2A5NDF**

### PRODUCT FEATURES

- 6 KW Peak
- TNC Connectors
- High Isolation

### BENEFITS

- Applicable for Radar and Communication Systems
- Robust Construction
- Better System Performance

### SPECIFICATIONS

Frequency	5.4 – 5.9 GHz
Insertion loss	0.4 dB
Isolation	20 dB
VSWR	1.25:1
Power Level	6 KW Peak, 0.001 Duty Cycle
Temperature	0 to 55°C
Size	1.24" x .75" x .76"