




.960 – 1.215 GHz Coaxial Circulator, UHF-Band, 3A2NJF

Designed for all your SatCom application needs, Renaissance has designed this UHF-band coaxial circulator. With the capability to handle 300 W Power CW, this circulator still offers our signature features of high isolation and low insertion loss in a compact footprint.

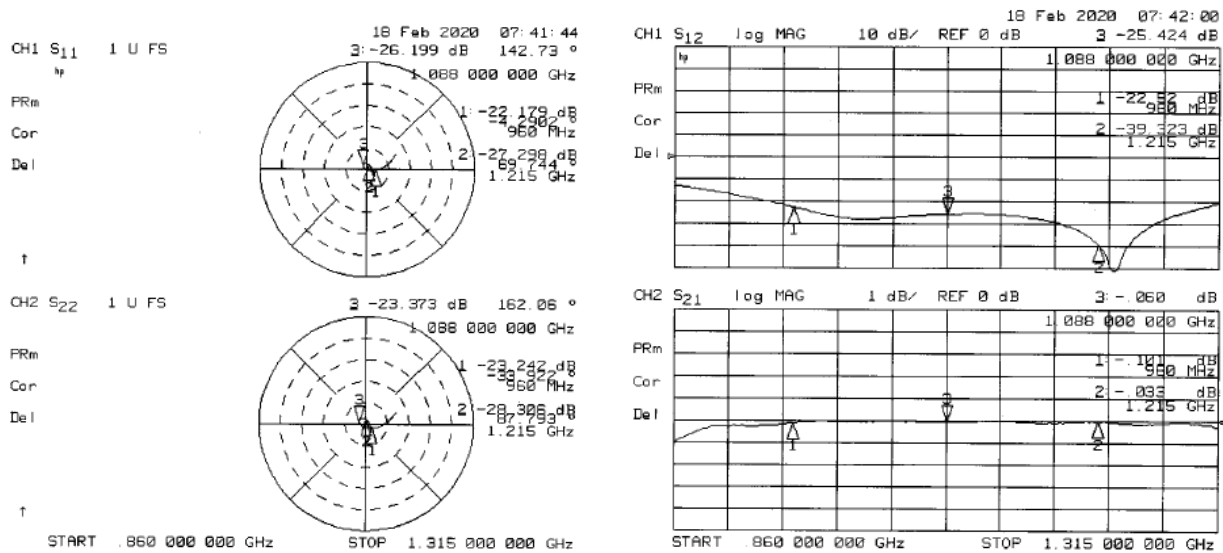

Features and Benefits

- 300 Watt Power CW
- High isolation and low insertion loss
- Compact footprint
- Industrial temperature range
- Ideal for Satellite Communication applications (cellular phones, WiFi, TV, radio)

Specifications

Frequency	.960 – 1.215 GHz
Insertion loss	0.25 dB
Isolation	20 dB
VSWR	1.25 : 1
Power	300W CW
Temperature	-20°C to +65°C
Size	1.67" x 1.50" x 1.01"