


9.0 – 10.0 GHz Coaxial Circulator, X-band, 3A8NBR

For X-band radar applications, Renaissance has designed a high power coaxial circulator. Operating in the 9 – 10 GHz frequency range, it offers low VSWR while handling 200W of Peak power.

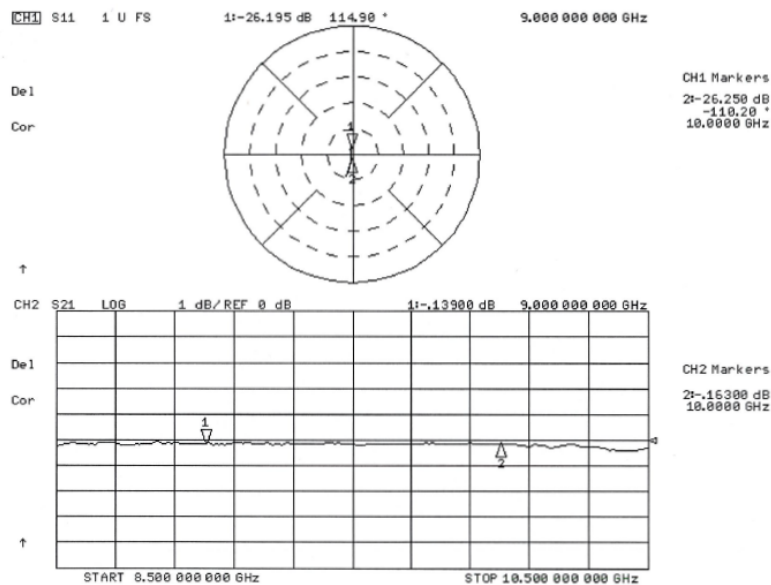

Features and Benefits

- High reliability
- High Peak power
- Compact size
- Low VSWR

Specifications

Frequency	9 – 10 GHz
Insertion loss	0.5 dB MAX 0.3 dB TYP
Isolation	20 dB
VSWR	1.25 : 1
Power	200W Peak
Temperature	0°C to 60°C
Size	.50" x .62" x .50"