


8.0 – 12.4 GHz Coaxial Isolator, X-band, C1-X16313

For use in radar applications, including military land, airborne and naval radars, Renaissance offers this 8.0 – 12.4 GHz X-band coaxial isolator. It provides solid system fidelity through low insertion loss and easy installation with its compact size

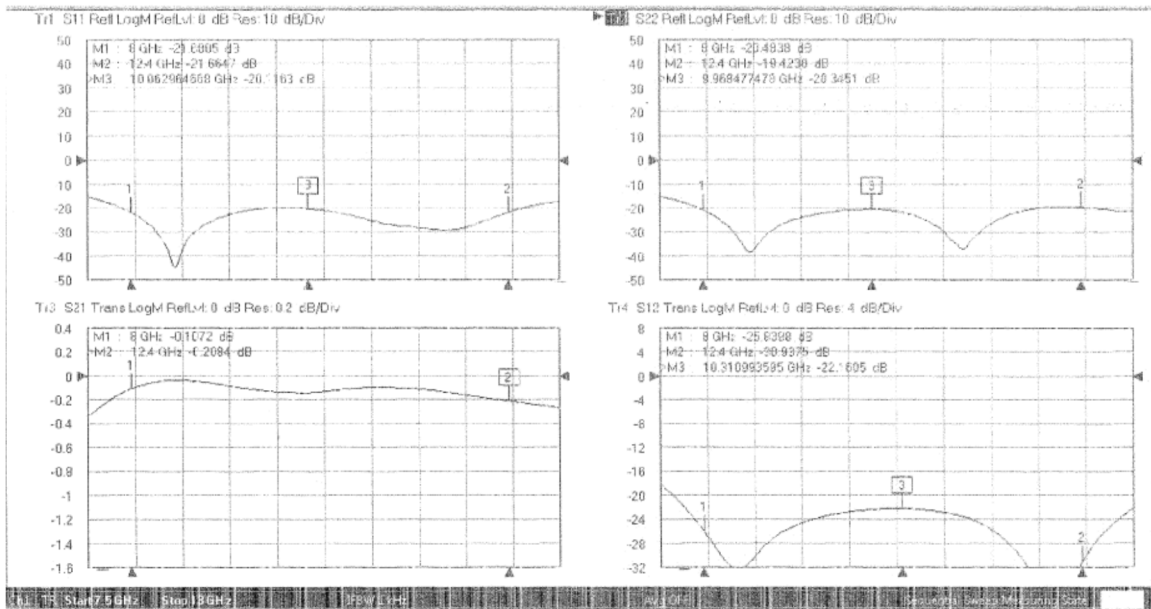

Features and Benefits

- Low insertion loss improves system fidelity
- Small footprint provides ease of installation
- Effective across many military and commercial radar applications

Specifications

Frequency	8.0 – 12.4 GHz
Insertion loss	0.4 dB
Isolation	20 dB
VSWR	1.25 : 1
Size	2.22" x 1.30" x .750"