


## In-Band Duplexer

Renaissance Electronics has designed an in-band duplexer for LTE cell site applications. With a compact 4.75" x 3.15" footprint, the duplexer provides 30 dB rejection between Tx and Rx. Insertion loss less than 1 dB ensures optimal transmit and receive performance. The duplexer can handle 10 W (CW) and operate from -20 to +70 °C.

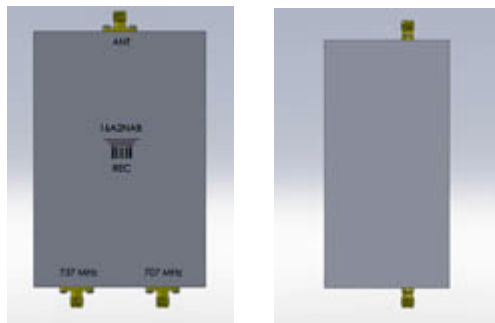

**Sept./Oct. 2010  
Wireless Edge  
Newsletter**

[In-Band Duplexer](#)

[HHPAV-362 60GHz](#)

[REC/HXI Blog](#)

[White Paper  
Download](#)

[New HXI Address](#)



If you would like more information please call 978-772-7774 or visit [www.rec-usa.com](http://www.rec-usa.com).

## HHPAV-362 60GHz Power Amplifier

The HHPAV-362 Power Amplifier covers the 59 to 61 GHz range and can be used up to 65 GHz. The amplifier can be used in transmitters for communication and radar systems and in test equipment suites. Multiple devices have been combined to achieve the output power while MMIC technology ensures high reliability and repeatability.

Download datasheet here:

<http://www.hxi.com/htdocs/prodserve/pdfs/HHPAV-362.pdf>

Contact Renaissance/HXI sales for more information at 978-772-7774 or [sales@hxi.com](mailto:sales@hxi.com).

## Launch of REC/HXI Blog

Renaissance Electronics Corporation has launched a new blog to augment communication with clients. Please check the blog for latest updates. Questions and comments are welcome.

Click here: [Renaissance Electronics/HXI Blog](#)

**For additional information please contact Renaissance Sales/HXI at 978-772-7774 or [sales@rec-usa.com](mailto:sales@rec-usa.com).**

## White Paper Download

What is the best wireless transport option for uncompressed HDTV Video? Unlicensed, Wireless, Transport SMPTE292M or Video using V-Band MMW. Find out in the latest white paper from REC/HXI.

Download here: <http://www.rec-usa.com/Ad/2.html>

**For more information please contact Renaissance/HXI Sales at 978-772-7774 or [sales@hxi.com](mailto:sales@hxi.com).**

## New HXI Contact Information starting October 15th

HXI is moving to the Renaissance Electronics corporate office at 12 Lancaster County Road, Harvard, MA 01451.

Starting October 15<sup>th</sup> the HXI contact number will change to 978-772-7774. All e-mail addresses will remain the same.

If you have any questions please call 978-772-7774 or **email at [sales@hxi.com](mailto:sales@hxi.com)**.

**HXI is a subsidiary of Renaissance Electronics Corporation.**

### [Forward email](#)

✉ [SafeUnsubscribe®](#)

This email was sent to marblemarketing@verizon.net by [sales@rec-usa.com](mailto:sales@rec-usa.com).

[Update Profile/Email Address](#) | Instant removal with [SafeUnsubscribe™](#) | [Privacy Policy](#).

Email Marketing by

