


DROP-IN FLANGE MOUNT ISOLATOR

FREQUENCY GHz	ISOLATION dB, MIN	INSERTION LOSS DB, MAX	VSWR MAX	POWER, WATTS		MODEL #	DIMENSIONS IN INCHES
				FWD	REV		
3.600 - 4.200	16	0.700	1.400:1	20	10	2K6NT	0.375 X 0.620 X 0.210
4.200 - 4.400	20	0.500	1.250:1	20	10	2K6NY	0.375 X 0.620 X 0.210
4.400 - 5.000	16	0.600	1.400:1	20	10	2K6NO	0.375 X 0.620 X 0.210
4.700 - 5.300	20	0.500	1.250:1	20	10	2K6NR	0.375 X 0.620 X 0.210
5.400 - 5.900	20	0.400	1.250:1	20	10	2K6NB	0.375 X 0.620 X 0.210
5.850 - 6.425	18	0.500	1.250:1	20	10	2K6NS	0.375 X 0.620 X 0.210
6.400 - 7.200	20	0.500	1.250:1	20	10	2K7NAJ	0.375 X 0.620 X 0.210
7.000 - 7.500	20	0.500	1.250:1	20	10	2K7NAK	0.375 X 0.620 X 0.210
7.250 - 7.750	20	0.500	1.250:1	20	10	2K7NBP	0.375 X 0.620 X 0.210
7.700 - 8.800	20	0.500	1.250:1	20	10	2K7NBY	0.375 X 0.620 X 0.210
8.500 - 9.600	20	0.400	1.250:1	20	10	2K8NC	0.375 X 0.620 X 0.210
9.000 - 10.000	20	0.350	1.250:1	20	10	2K8NA	0.375 X 0.620 X 0.210
10.000 - 11.700	20	0.500	1.250:1	20	10	2K8NI	0.375 X 0.620 X 0.210
10.100 - 10.700	20	0.500	1.220:1	10	5	2K8NK	0.350 X 0.475 X 0.190
10.950 - 12.750	20	0.400	1.200:1	10	5	2K8ND	0.350 X 0.475 X 0.190
11.167 - 12.342	20	0.500	1.250:1	20	10	2K8NQ	0.375 X 0.620 X 0.210
12.200 - 12.700	22	0.300	1.200:1	20	10	2K9NQ	0.375 X 0.620 X 0.210
12.700 - 13.300	20	0.600	1.250:1	20	10	2K9NM	0.375 X 0.620 X 0.210
12.750 - 14.500	18	0.600	1.300:1	20	10	2K9NAA	0.375 X 0.620 X 0.210
16.000 - 17.000	18	0.600	1.300:1	20	10	2K9NT	0.375 X 0.620 X 0.210

TYPICAL PACKAGE DIMENSIONS

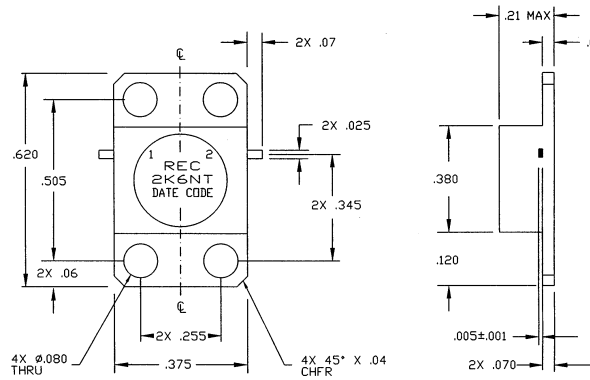

DROP-IN FLANGE MOUNT ISOLATOR

FREQUENCY GHz	ISOLATION dB, MIN	INSERTION LOSS dB, MAX	VSWR MAX	POWER, WATTS		MODEL #	DIMENSIONS IN INCHES
				FWD	REV		
7.500 - 10.000	16	0.800	1.500:1	10	5	2L8NAR	.500 X .250 X .180
10.400 - 10.900	20	0.050	1.250:1	10	5	2L8NAY	.500 X .250 X .180
9.500 - 10.500	20	0.400	1.250:1	10	5	2L8NAF	.500 X .250 X .180
10.700 - 11.700	20	0.050	1.250:1	10	5	2L8NAX	.500 X .250 X .150
11.600 - 12.400	20	0.350	1.250:1	10	5	2L8NAG	.500 X .250 X .180
11.000 - 13.000	18	0.500	1.300:1	10	5	2L9NCY	.500 X .250 X .160
13.000 - 14.100	22	0.500	1.250:1	10	5	2L9NAD	.500 X .250 X .150
14.000 - 15.500	20	0.500	1.250:1	10	5	2L9NBK	.500 X .250 X .180
16.000 - 16.500	16	0.700	1.350:1	10	5	2L9NCT	.500 X .250 X .180
17.000 - 19.000	16	0.700	1.350:1	10	5	2L9NBB	.500 X .250 X .180
17.500 - 20.000	18	0.700	1.300:1	10	5	2L9NAY	.500 X .250 X .180
20.000 - 21.000	18	0.700	1.350:1	10	5	2L9NBA	.500 X .250 X .150
21.000 - 24.000	18	1.000	1.300:1	10	5	2L9NCB	.500 X .250 X .150
24.200 - 26.500	18	1.000	1.400:1	10	5	2L9NCA	.500 X .250 X .150
27.500 - 28.500	16	1.200	1.500:1	10	5	2L9NAS	.500 X .250 X .150
29.500 - 30.000	16	1.200	1.500:1	10	5	2L9NBU	.500 X .250 X .150
37.050 - 39.000	17	1.000	1.500:1	10	5	2L9NAR	.500 X .250 X .150

TYPICAL PACKAGE DIMENSIONS

